


## ENC-2211S PCIe x4 Network Bypass Module with Dual Optical Fiber Ports

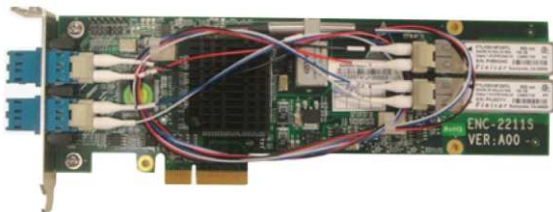

### Features

- Server-grade PCIe optical fiber network adapter
- Intel® 82576EB high-performance network chip
- 2 x LC 1000M optical fiber port, bypass function supported
- Can be used in network security and industrial computers

<b>Specifications</b>	Half-size PCIe
<b>Interface Structure</b>	Brackets, including long and short brackets
<b>Network Port</b>	2 x LC port
<b>Ethernet chip</b>	Intel® 82576EB
<b>Bypass</b>	Optional port bypass supported
<b>Operating System</b>	Windows, LINUX
<b>Operating Environment</b>	Temperature: 0°C~55°C; Humidity: 5%~95%, non-condensing;
<b>Storage Environment</b>	Temperature: -20°C~80°C; Humidity: 5%~90%, non-condensing;
<b>EMC</b>	Limits of radio disturbance are compliant with GB9254-1998 class A; Immunity to disturbance is compliant with the limits of GB/T 17618.5-2008
<b>Dimensions</b>	205mm (L) x 69mm (W) x 18.4mm (H)