

PDS-1502


15" Industrial Panel Monitor



Features:

- ◆ 15" TFT LCD screen, touch screen optional
- ◆ LCD brightness and contrast ratio adjustable manually or automatically, standby
- ◆ power-save mode
- ◆ High-strength and elegant Al-alloy panel, stylish design
- ◆ Optional IP65 front panel, overall Ip54
- ◆ Installation compatible with VESA, wallmount and wall-embedded

Product size chart

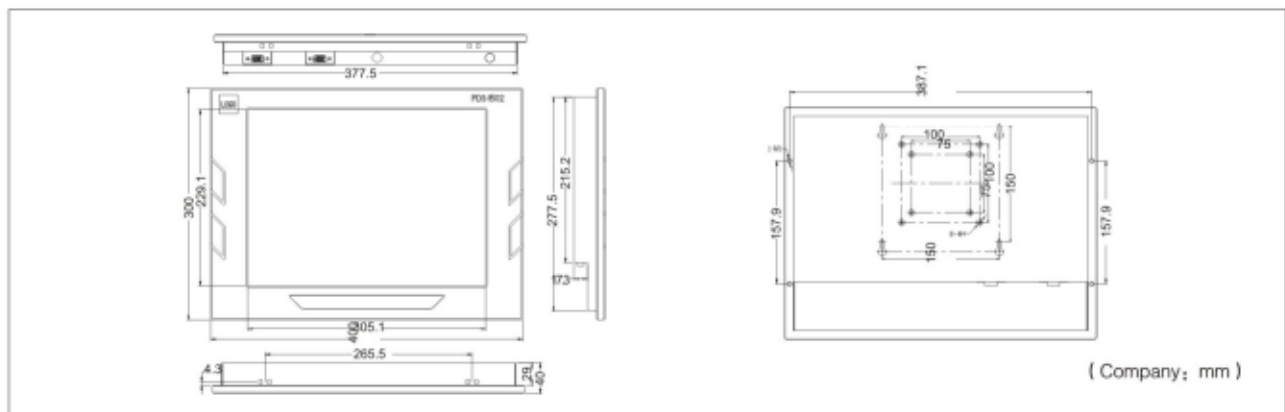

Specifications

Display	Screen Size	15" TFT LCD
	Resolution	1024 * 768
	Brightness	350cd/m2
	Contrast Ratio	500:1
Touch Screen	5-wire resistive touch screen	
Supported Color	16.7M	
Input Interface	VGA	
Front Panel	With OSD control key	
Install	VESA, Wallmount and Wall-embedded	
Protection Level	Front Panel IP65, IP64 for the whole PC	
Vibration	5-19Hz/1.2mm amplitude, 19-200Hz/1.2g acceleration	
Shock	15g peak acceleration (11 ms duration)	
Weight	About 4.5kg	
Operating Temperature	0°C ~ 55°C ;5% ~ 95%,40°C (non-condensing)	
Storage Temperature	-20°C ~ 60°C ;5%~95%,40°C (non-condensing)	
Power Supply	Supports DC12V or AC 100~240V input	
Dimensions(W x H x D)	400mm x 300mm x 40mm	

Ordering Information

Part Number	Model Number	Description
0020-012231	PDS-1502/VGA/15"display/ tempered glass/adapter	15" industrial panel display (1024 x 768), supporting OSD function and VGA port; IP65 protection grade for front panel; powered by external power adapter.
0020-012201	PDS-1502T/VGA/15"display/ touch screen/adapter	15" industrial panel display (1024 x 768) with touch screen, supporting OSD function and VGA port; IP65 protection grade for front panel; powered by external power adapter.