

EIS-6205S


3U, 19" rack mount high-end industrial server



Features:

- ◆ Current mainstream server platform C602
- ◆ Onboard perfect LSI professional Raid solution: LSI SAS2 Raid0, 1, 10
- ◆ Latest dual-channel Xeon E5 V2 full-family high-end CPUs
- ◆ Multiple PCI-E 3.0 direct-insertion expansion slots (6 x PCI-E x8, 2 x PCI-E x16)
- ◆ Onboard 4 x 1000Mbps (Intel i350) Ethernet LAN port
- ◆ Onboard professional IPMI2.0 remote management solution
- ◆ 16 x drawable HDD bay, supporting to up to 64TB local storage

Product size chart

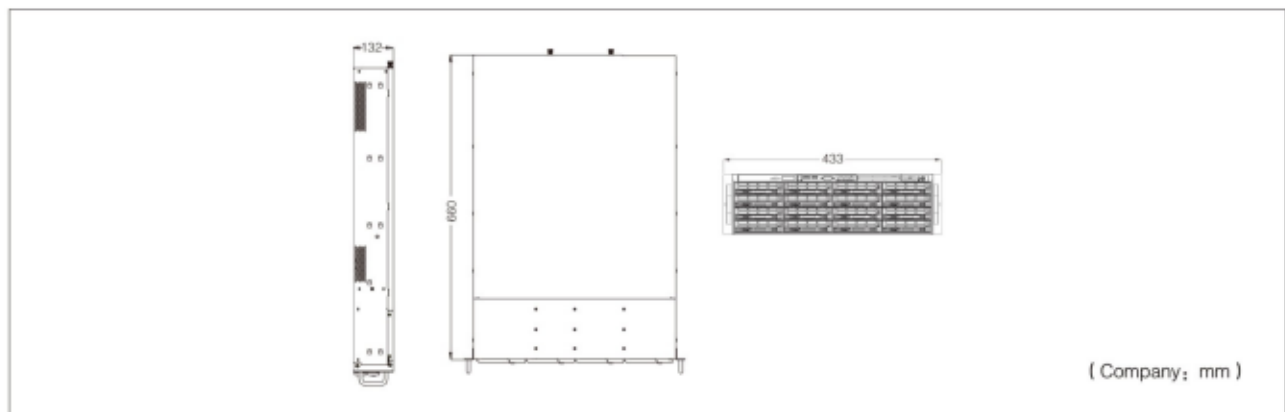

Specifications

| | |
|---------------------------|---|
| Product model | EIS-6205S |
| Appearance specifications | 3U, 19" rack mount high-end industrial server |
| Quantity of CPUs | 1 / 2 |
| CPU model | Xeon E5-2600 and E5-2600 V2 |
| Chipset | Intel C600 family(C602/604) |
| Memory | Single CPU supports 8x DDR3 DIMM, supports up to 256GB (a single memory module supports 32GB RDIMM) Dual CPU supports 16x DIMM, supports up to 512GB |
| Local Storage | 16 x hot swappable 3.5" HDD bay |
| RAID Support | Nonsupport RAID, only supports RAID0/1/10 and RAID1/5 optional |
| Onboard Network | Onboard 4x1000Mbps RJ45 network ports; 1 x RJ45 network port for IPMI. |
| I/O expansion | Onboard 4 x full-height PCI-E x8, 2x full-height PCI-E x16 expansion |
| Integrated I/O Ports | 1 x VGA port, 7x USB port, 1x COM ports |
| Management | Onboard BMC, supports IPMI\SOL\KVN Over Ip\Virtual Media |
| Operation System Support | Microsoft® Windows Server® 2012 Microsoft Windows Server 2012 Essentials Microsoft Windows Server 2008 R2 SP1, x64 (including Hyper-V® v2) Windows Server 2008 for Embedded Chinese standard version Novell® SUSE® Linux Enterprise Server Red Hat® Enterprise Linux® Windows 7 SP1 |
| Power Supply | Supports 860W redundant power supply |
| Working temperature | 0°C ~ 40°C |
| Dimensions | 433mm(W) × 132mm(H) × 660mm (D) |

Ordering Information

| Part Number | Model Number | Description |
|---|--|---|
| EIS-6205S/ Barebone system | EIS-6205S/ Barebone system | EVOC 3U industrial server/C602 platform/supports dual Xeon E5/16 x DIMM/ LSI SAS2 Raid0,1,10/ 8 x 3.5" drawabble HDD bay/4 x GbE/1 x COM/ 1 x VGA/2 x full-height PCI-E x16/4 x full-height PCI-E x8/860W redundant power supply |
| EIS-6205S-01/ original industrial server | EIS-6205S-01/ original industrial server | EVOC 3U industrial server/C602 platform/1 x E5-2609V2 2.5GHz CPU/1 x 8GB ECC memory/LSI SAS2 Raid0,1,10 /1 x 500G monitoring-level HDD/7 x 3.5" drawabble HDD bay/1 x ultra-slim optical drive/4 x GbE/1 x COM/1 x VGA/2 x full-height PCI-E x16/4 x full-height PCI-E x8/860W redundant power supply |
| EIS-6205S-02/ original industrial server | EIS-6205S-02/ original industrial server | EVOC 3U industrial server/C602 platform/2 x E5-2609V2 2.5GHz CPU/2 x 8GB ECC memory/LSI SAS2 Raid0,1,10 /2 x 500G monitoring-level HDD/6 x 3.5" drawabble HDD bay/4 x GbE/ 1 x COM/ 1 x VGA/2 x full-height PCI-E x16/4 x full-height PCI-E x8/860W redundant power supply |